

TF-1600series Barrier Gate

TF-1600series Barrier Gates are used in conjunction with Amano Parking Equipment to achieve the most efficient revenue and access control in the parking management industry.


■ Features

- Tough Weather-Resistant Design
- Sturdy Tamper-Resistant 2.0mm Steel
- Strong Baked-Enamel Finish (Yellow Standard)
- Capacity for Up to Three Vehicle Detectors (Exit Gate)
- Arm Controlled by Clutch Enhanced Monitor
- Easy to Use Hand-Crank to Open/Close Gate Arm in Case of Power Failures

■ Available Options

- Straight or Folding Aluminum Arm (4m max)
- Straight Fiber Glass Arm (6m max)
- Auto Reverse Sensor Device
- Thermostat-Controlled heater
- Voice Announcement kit
- Gate Arm Broken Signal Output
- Vehicle Count Signal Output
- Exit Caution Light Signal Output
- Various Paint Colors Available Upon Request

■ Dimensions

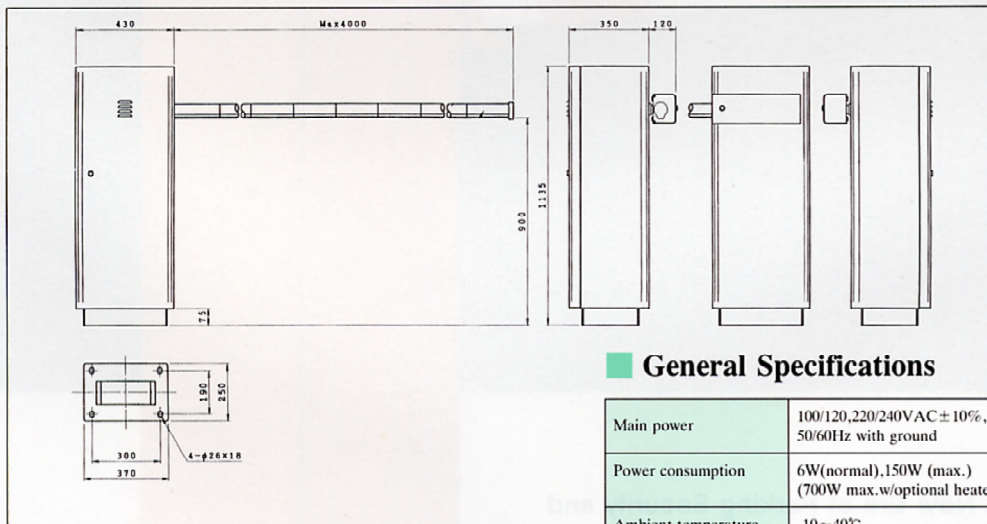

■ General Specifications

Main power	100/120,220/240VAC±10%, 50/60Hz with ground
Power consumption	6W(normal),150W (max.) (700W max.w/optional heater)
Ambient temperature	-10~40°C (-25~40°C w/optional heater)
Ambient humidity	10~90%RH (non-condensing)
Gate Arm	4000mm (max.)
Net weight	90kg

Specifications and operational characteristics subject to change without notice.

Distributed by

AMANO Corporation
275MAMEDO-CHO,KOHOKU-KU,YOKOHAMA JAPAN
TEL(045)401-1440 FAX(045)439-1151